

marantz®



SR7013


9.2CH 4K ULTRA HD AV RECEIVER

WITH DOLBY ATMOS, DTS:X, AURO-3D, IMAX ENHANCED AND HEOS

Enjoy three-dimensional audio and advanced video processing with the 9.2 channel Marantz SR7013. For superior music quality, Marantz-unique HDAM circuit technology provides optimal fidelity and dynamic range of high-resolution files. Stream music from Spotify, Pandora, TIDAL, Deezer and more with built-in Bluetooth, HEOS or AirPlay 2, and control it all with Amazon Alexa voice compatibility.

Highlights

- 9.2 channel discrete power amplifier, 125 W per channel (8 ohm, 20 Hz - 20 kHz, 0.05% 2ch drive)
- 8 HDMI inputs (incl. 1 front) with full HDCP 2.2 support; 3 HDMI outputs (incl. Zone 2)
- Advanced video processing with analog to HDMI, SD to HD/4K upscaling
- 4K/60 Hz full-rate pass-through, Dolby Vision compatibility, HDR, HLG and BT.2020
- Three-dimensional audio formats Dolby Atmos, DTS:X (up to 7.1.4 with an external 2ch amplifier), Auro-3D, DTS Virtual:X for height virtualization effects and IMAX enhanced
- eARC (Enhanced Audio Return channel) supports the transmission of 3D audio from your TV apps with a single HDMI connection
- Stream music from Internet Radio, Spotify Connect, Pandora, SiriusXM, Amazon Music, TIDAL, Deezer and more with Bluetooth, Airplay2 or HEOS built-in
- Built-in Wi-Fi with 2.4GHz/5GHz dual band support
- Enjoy multi-room whole-home audio streaming with HEOS technology
- Amazon Alexa voice control via the HEOS Home Entertainment skill
- Marantz 2016 AVR remote for control over the latest generation of Marantz network AV Receivers. Available on iOS and Android.
- High-resolution DSD (2.8/5.6MHz), FLAC, ALAC and WAV support
- AKM AK4458 32-bit D/A converters, HDAM circuit boards and Current Feedback circuitry for optimum fidelity and maximum dynamic range
- Suite of Audyssey room correction software: Audyssey MultEQ XT32, Dynamic Volume and Dynamic EQ, LFC and Sub EQ HT
- Seamless out-of-the-box experience with Quick Start Guide, guided Setup Assistant and Marantz AVR Remote app
- Advance support for custom integration with Web interface and remote system monitoring with support of IH1I and Domotz Pro

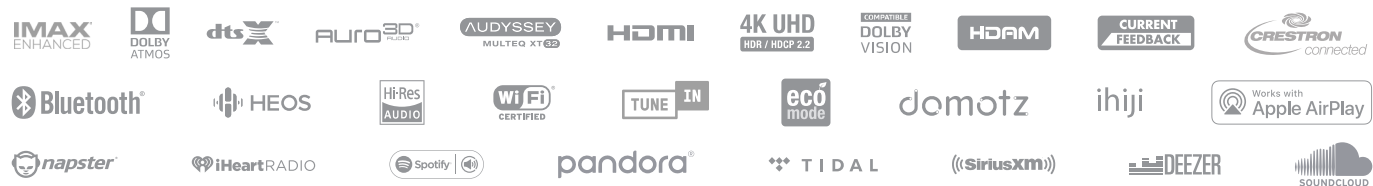

because music matters

marantz®

SR7013

9.2CH 4K ULTRA HD AV RECEIVER WITH DOLBY ATMOS, DTS:X, AURO-3D, IMAX ENHANCED AND HEOS



Design and specifications are subject to change by Marantz without notice.

FEATURES SR7013

MULTICHANNEL SURROUND

DTS HD Master / DTS:X / DTS Neural:X	• / • / • (11ch)
DTS Virtual:X	•
Dolby TrueHD / Dolby Atmos / Dolby Surround	• / • / •
Auro-3D / Auromatic	• / •
Multichannel stereo	•
Max number of processing (preamp) channels	11.2
Audyssey	MultEQ XT32 with LFC/Sub EQ HT
Audyssey Dynamic EQ / Dynamic Volume	• / •
Compressed audio enhancer: MDAX2	•

NETWORK

HEOS multi-room and streaming / network audio streaming	• / •
Lossy formats: MP3 / WMA / AAC	• / • / •
Lossless formats: FLAC / ALAC / WAV	• / • / •
FLAC HD 192/24 / WAV 192/24 / ALAC 192/24	• / • / •
DSD audio streaming	up to DSD5.6
Gapless playback	• (FLAC, WAV, ALAC, DSD)
AirPlay2 audio streaming	•
Internet Radio (Tuneln)	• (Tuneln)
Spotify Connect / Pandora / SiriusXM	• / • / •
Compatible with Remote app (iOS/Android)	Marantz 2016 AVR Remote
Ethernet / Wi-Fi	• / •
Bluetooth	•

HDMI

4K 60Hz 4:4:4 resolution / HDCP 2.2	• / •
eARC (Enhanced Audio Return Channel)	•
Analog to HDMI scaling	480i/576i up to 4K 60/50
HDMI to HDMI scaling	up to 4K 60/50
GUI overlay on HDMI	•
HDR / HLG / Dolby Vision	• (HDR10) / • / •
3D signal pass-through	•
HDMI pass-through in Standby Mode	•

* This feature is not available in all countries.

MULTIROOM / CI

HEOS multi-room integrated	•
Multi-room zones	3
Zone audio source: HDMI / Opt, Coax / Network, USB / Analog	• (2ch) / • (2ch) / • / •
IP Control / RS232 Control / Web Control / App Control	• / • / • / •

INPUTS/OUTPUTS

VIDEO

Composite in/out	3+1 / 1
Component in/out	3 / 1
HDMI in/out	7+1 / 3

AUDIO

Analog in/out	5+1 / -
Phono (MM) in	•
Digital in: Optical / Coaxial	2 / 2
Multi-room out: Analog / Digital	2 / -
Multichannel pre-out	• (11.2)
Subwoofer out	2 (independent)
7.1 Multichannel input	•

OTHER

Speaker terminal: gold-plated screw/regular screw	• / -
---	-------

SPECIFICATIONS

Number of poweramps	9
Number of speaker terminals	11
Power output (8 ohm, 20 Hz - 20 kHz, 0.05% 2ch drive)	125 W
Power output (6 ohm, 1 kHz, 10% 1ch drive)	235 W

GENERAL

System remote control	RC036SR
Power consumption in W	710
Power consumption no-sound (ECO on / off) in W	65 W / 110 W
Standby consumption in W	0.2
Maximum dimensions w/o antenna: (W x D x H) in inches	17.3 x 15.8 x 7.3
Weight in lbs	31.1

UPC

SR7013/U1B	Black	699927201753
------------	-------	--------------

Sound United LLC
North America Regional Headquarters
1 Viper Way
Vista, CA 92081

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Dolby, Dolby Atmos, Dolby Surround, Dolby Vision, and the double-D symbol are trademarks of Dolby Laboratories. DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X Logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. The Spotify software is subject to third party licenses found here: www.spotify.com/connect/third-party-licenses. Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

* All specs can be subject to change.