

# marantz®



## SR6014 9.2CH 4K ULTRA HD AV RECEIVER WITH HEOS BUILT-IN

Drive exquisitely detailed home cinema with the Marantz SR6014 9.2 channel 4K UHD AV receiver. Delight in the most musical sound for any source — from home theater, to vinyl, to digital streaming. Totally immerse yourself in movies and TV with elevated surround sound formatting from Dolby Atmos, DTS:X and new IMAX Enhanced. Enjoy seamless voice control from the leading voice agents, multi-room connectivity and advanced HDMI technology.


- 9.2 channel discrete power amplifier, 110W per channel (8-ohm, 20Hz – 20kHz, 0.08% THD 2ch. drive)
- IMAX Enhanced, Dolby Atmos, Dolby Atmos Height Virtualization Technology, DTS:X and DTS Virtual:X processing
- 8 HDMI inputs, including 1 HDMI input on the front panel, with full HDCP 2.3 support and 3 HDMI outputs including 1 HDMI output supporting eARC function
- 4K/60 Hz full-rate pass-through, 4:4:4 color resolution, HDR 10 and BT.2020, plus Dolby Vision compatibility and Hybrid Log-Gamma (HLG)
- Decodes ALAC, FLAC and WAV lossless files up to 24-bit/192-kHz — plus DSD 2.8MHz and 5.6MHz tracks let you enjoy music exactly as the artist intended
- Marantz proprietary HDAM circuit boards for more detailed, dynamic sound
- Integrated phono input with HDAM EQ stage to connect your turntable
- Play songs from Spotify, Pandora, Tidal and more via AirPlay 2, Bluetooth and the HEOS app (music streaming services may vary by region)
- Features HEOS Built-in: Advanced technology enables multi-room audio, voice control and digital music streaming
- Supports Amazon Alexa, Google Assistant and Apple Siri voice agents: Use your voice to control the SR6014
- Auto Low Latency Mode (ALLM) ensures Xbox One users have a more responsive and immersive gaming experience
- Integrates with your home network: Built-in Wi-Fi with 2.4GHz/5GHz dual band support
- Seamless control with your smartphone: Marantz AVR remote app available for iPhone and Android devices



# because music matters

# marantz®

## SR6014 9.2CH 4K ULTRA HD AV RECEIVER WITH HEOS BUILT-IN

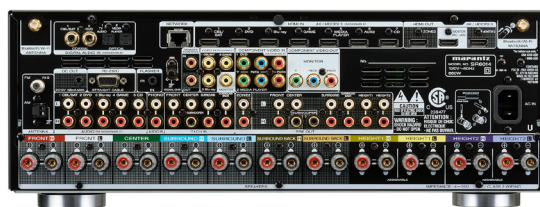

FEATURES	SR6014
<b>MULTICHANNEL SURROUND</b>	
DTS HD Master / DTS:X / DTS Neural:X	• / • / •
DTS Virtual:X	•
IMAX Enhanced	•
Dolby TrueHD / Dolby Atmos / Dolby Atmos Height Virtualization	• / • / •
Dolby ProLogic IIz / Dolby Surround	- / •
Multichannel Stereo	•
Max Number of Processing (Preamp) Channels	11.2
Audyssey	MultEQ XT32 with LFC/Sub EQ HT
Audyssey Dynamic EQ / Dynamic Volume	• / •
Compressed Audio Enhancer: MDAx2	•
<b>NETWORK / SOURCES</b>	
HEOS Multi-Room and Streaming / Network Audio Streaming	• / •
Lossy Formats MP3 / WMA / AAC	• / • / •
Lossless Formats FLAC / ALAC / WAV	• / • / •
FLAC HD 192/24 / WAV 192/24 / ALAC 192/24	• / • / •
DSD Audio Streaming	Up to DSD5.6
Gapless Playback	• (FLAC, WAV, ALAC, DSD)
AirPlay2 Audio Streaming	•
Internet Radio (TuneIn)	•
Spotify Connect / Deezer / TIDAL / Napster / Pandora / SiriusXM	• / • / • / • / • / •
Compatible with Remote App (iOS / Android)	Marantz 2016 AVR Remote
Ethernet / Wi-Fi	• / • (dual antenna / dual band)
Bluetooth	•
<b>HDMI</b>	
4K 60Hz 4:4:4 resolution / HDCP 2.3	• / •
eARC (Enhanced Audio Return Channel)	•
Analog to HDMI Scaling	480i/576i up to 4K 60/50
HDMI to HDMI Scaling	up to 4K 60/50
GUI Overlay on HDMI	•
HDR / HLG / Dolby Vision	• (HDR10) / • / •
ALLM (Auto Low Latency Mode) Pass-through for Gaming	•
3D Signal Pass-Through	•
HDMI Pass-Through in Standby Mode	•
<b>MULTIROOM / CI</b>	
HEOS Multi-Room Integrated	•
HEOS Link Compatibility: IR/ IP	• / •
Multi-Room Zones	2
Zone Audio Source: HDMI / Opt, Coax / Network, USB / Analog	• (2CH) / • (2 CH) / • / •
IP Control / RS232 Control / Web Control / App Control	• / • / • / •
Domotz Pro / IHIJI / OvrC compatible	• / • / •
<b>INPUTS/OUTPUTS</b>	
<b>VIDEO</b>	
Composite In / Out	3+1 / 1
Component In / Out	2 / 1
HDMI In / Out	7+1 / 3 (2 Main + 1 Zone)

<b>AUDIO</b>	
Analog In / Out	5+1 / -
Phono (MM) In	•
Digital In: Optical / Coaxial	2 / 2
Multi-Room Out: Analog / Digital	1 / -
USB Audio / Made for iPod / Made for iPhone	• / - / -
Multichannel Pre Out	• (11.2)
Subwoofer Out	2 (Independent)
7.1 Multichannel Input	•
<b>OTHER</b>	
Speaker Terminal: Gold Plated Screw / Regular Screw	• / -
Speaker A / B	Assignable
Bi-Amp Drive	Assignable
Multi-Room Speaker Terminal	Assignable
Front Inputs: Audio / Composite / Digital (Opt) / HDMI / USB	• / • / - / • / •
<b>OTHERS</b>	
FL Display	Port Hole
Graphic User Interface - GUI	Advanced
ISF Certification	•
GUI Languages	3
Setup Assistant	•
Smart Select	•
Firmware Update by Network / USB	• / •
Variable Cross Over	•
Optimized Bass Redirection	•
Bass Sync	-
ECO Mode	•
Auto Power Off	•
Sleep Timer	•
<b>SPECIFICATIONS</b>	
Number of Poweramps	9
Number of Speaker Terminals	11
Power Output (8 ohm, 20 Hz - 20 kHz, 0.08% 2ch Drive)	110 W
Power Output (8 ohm, 20 Hz - 20 kHz, 0.05% 2ch Drive)	150 W
Power Output (6 ohm, 1 kHz, 10% 1ch Drive)	220 W
<b>GENERAL</b>	
Available Colors	Black
System Remote Control	RC035SR
Power Consumption in W	680
Power Consumption No-Sound (ECO on/off) in W	60 / 100
Standby Consumption in W	0.2 (with CEC 0.5)
<b>Maximum Dimensions</b>	
Antenna Horizontal: W x D x H	17.3 x 15.7 x 6.3 in
Antenna Vertical: W x D x H	17.3 x 15.7 x 9.0 in
w/o Antenna: W x D x H	17.3 x 14.5 x 4.1 in
Weight	28.2 lbs
<b>UPC</b>	
NA SR6014/U1B	699927231750
	Black

Design and specifications are subject to change by Marantz without notice.

Sound United  
1 Viper Way  
Vista, CA 92081  
United States

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Dolby, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories. DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. The Spotify software is subject to third party licenses found here: [www.spotify.com/connect/third-party-licenses](http://www.spotify.com/connect/third-party-licenses). Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

\* All specs can be subject to change.